


EVERDIGM Attachment **Quick Coupler**

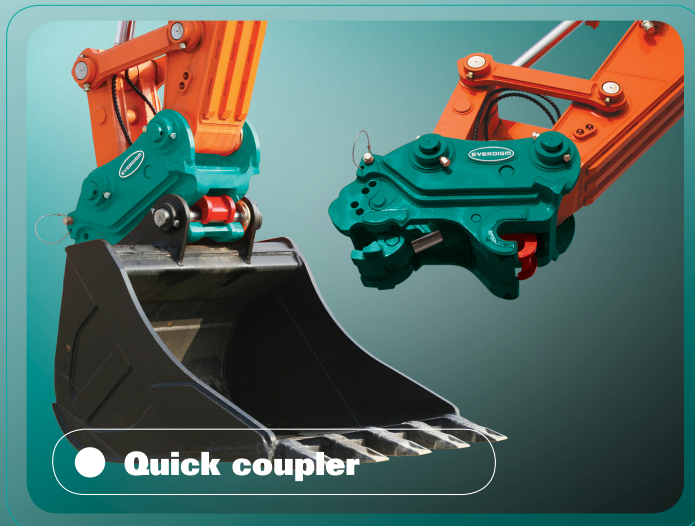

Tools that make people move

Quick coupler Series
Turning your job into more value!

**Safety**

More advanced safety which is enabled by triple safety devices

- Auto safety locking cylinder (EOX-05 and above larger model)
- Main cylinder with built-in safety check valve
- Manual safety pin

Convenience

EOX series provide the best convenience with Full Automatic safety locking cylinder which is connected with quick coupler Lock / Release operation.

Quality

High strength with wear resistance material and high pressured cylinder provides excellent durability

Compatibility


Wide pin mount range by 4 pin grabber structure provide all attachment installation without any modification on mounting area.

Aesthetics

Slick & stylish design to harmonize with all excavators & attachments

Optimization

Light weight, low profile, fast operating – 10 years know-how and latest 3D Computer Aided Design & Engineering gives the right coupler you've waited for

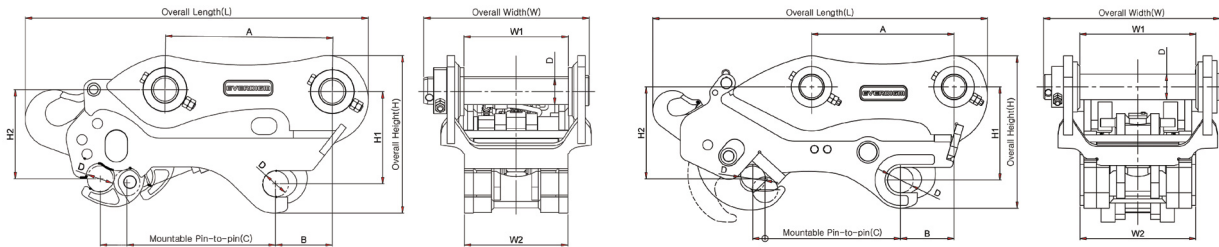

Specification	Unit	EOX05							EOX08	EOX14				EOX14P ^①			
		D1	H1	L1	U1	V0	V1	VC1	V1	D1	H1	V1	VC1	D1	H1	V1	VC1
Overall Length(L)	mm	661			636		661		709	877	867	877		952		947	
Overall Height(H)	mm	331	317		321	312	317		367			410		423		420	
Overall Width(W)	mm		286		280		286		307				418		441		441
Weight *	kg	76		71	69	72	78		106	186	180	192		220	342	211	
Mounting Width(W1)	mm	156	165	150	145	160	159		171	261	260	275		261	331	275	
Mounting Width(W2)	mm	155	164	150	144		158		169	259	258	247		259	330	274	
Pin-to-pin(A)	mm	260	285		230		285		300	400		390		405		385	
Offset Distance(B)	mm		145		150		145		130		133			150		150	
Mountable Pin-to-pin(C)	mm	256-303	257-303		217-293		257-303		282-355		356-424				378-415		
Pin Diameter(D)	mm				45				60		65				65		
Offset Height(H1)	mm	185	175		179		195		225		254				250		
Offset Height(H2)	mm	202			187				247-253		247-253				255		
Operation Pressure	bar				30-280				30-280		30-350				30-350		
Oil Flow	lpm				10-20				10-20		10-20				10-20		
Applicable Excavator		Doosan S55-VG S55-VGP S55W-V S55W-VGP DX555	Hyundai R55-7	Kobelco SK55SR-3	Kubota U-50	Volvo ECR58C	Volvo EC55B EW55B ECR58	Volvo EC55C EW60C	Volvo ECR88	Doosan DX140W DX140LC	Hyundai R140LC-7 R140W-7	Volvo MX135WS EC140B EW130 EW145BP	Volvo EC140C	Doosan DX140W DX140LC	Hyundai R140LC-7 R140W-7	Volvo EW145B	Volvo EC210C

Specification	Unit	EOX22				EOX22P ^①		EOX24	EOX30				EOX30P ^①			EOX33P ^①			EOX45P ^①		
		D1	H1	VC1	VC2	VC1	VC2	VC1	D1	H1	VC1	VC2	D1	H1	VC1	D1	H1	VC1	D1	H1	VC1
Overall Length(L)	mm		1,066			1,100		1,161	1,160		1,161		1,205	1,198	1,288	1,291	1,314	1,400	1,316		
Overall Height(H)	mm		522			520		575	586		575		545	540	595	608	612	656	650	614	
Overall Width(W)	mm		504			531		606	618		634		625		649		666	721	679	706	
Weight *	kg	348	342		348	370		526	534		562		542		532	659	662	697	901	872	735
Mounting Width(W1)	mm	333	331		326	326		381	395	400	411		395	400	411	410	432	441	472	432	470
Mounting Width(W2)	mm	332	330		325	325		380	394	398	410		394	398	410	408	430	440	470	430	468
Pin-to-pin(A)	mm		471			470		515		515			515		505		575	590	600	570	
Offset Distance(B)	mm		178			166		190		190			175		190		185	210	205	205	185
Mountable Pin-to-pin(C)	mm		443-513			453-488		488-603		488-603			505-535		490-523		545-585		567-597		545-585
Pin Diameter(D)	mm		80			80		90		90			90			100		100,110		120	100,110
Offset Height(H1)	mm		285			310		350					330			353		370		390	364
Offset Height(H2)	mm		310-315			283		353-365		353-365			325			357		353		386	
Operation Pressure	bar		30-350			30-350		30-350		30-350			30-350					30-350			
Oil Flow	lpm		10-20			10-20		10-20		10-20			10-20					10-20			
Applicable Excavator		Doosan S180W-V S225LCV S210W-V DX210W DX220LC	Hyundai R200W-7	Volvo EC210BP	Volvo EC210C	Volvo EC210B	Volvo EC210C	Volvo EC240C	Doosan S290LC-V S300LC-V DX300LC	Hyundai R290LC-7	Volvo EC290BP	Volvo EC290C	Doosan S290LC-V S300LC-V DX300LC	Hyundai R290LC-7	Volvo EC290BP	Doosan DX380LC S330LC-V	Hyundai R360LC-V	Volvo EC360C	Doosan DX480LC	Hyundai R520LC	Volvo EC460C

* Note : ① "P" means "Pull type", and without "P" means "Push type"

Head Office & Factory

332-3, Janggwan-ri, Jincheon-eub, Chungcheongbuk-do, Korea
Tel_+82-43-530-3300 Fax_+82-43-530-3429

Sales & Marketing

Room #1203, Woolim Lion's Valley 2, 680, Gasan-Dong, Geumcheon-Gu, Seoul, Korea
Tel_+82-2-801-0800 Fax_+82-2-801-0899



©EVERDIGM Corp. Printed in Korea