

**EVERDIGM** Attachment

**Grab**



**Tools that make people move**

Hydraulic Grab Series  
Turning your job into more value!



### Features and benefits

#### Various choice

Two optional grab types are available according to job condition and customer preference

#### Easy maintenance and repairing

Comparing with old models, new EMG series provide easy maintenance and repairing


#### New models

The following models are newly designed

- Two models (EMG05 and EMG08) are prepared for small excavators
- EMG17 is designed 17~23 ton excavator with high performance


#### Weight balance with excavator

Working weight are reduced comparing with current EMG series for easy handling & stable work

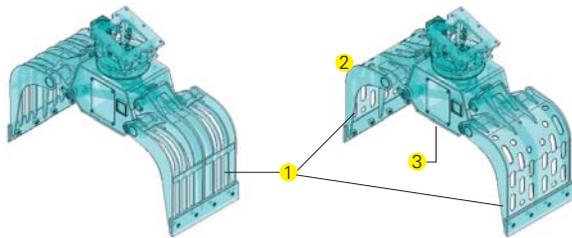


#### 1. Two optional jaw types

Two optional jaw types (Rib type & Perforated type) are available according to job condition and customer preference




#### 2. Jaw shape change

Angular shape jaw provides more bigger capacity than circular shape



#### 4. Stopper

Stopper is located on the body and it reduces the cylinder when grabs are opened







#### 5. HARDOX plate

HARDOX plates are adapted on the jaw and bottom plate of body where the wear resistance and durability are required

#### 3. Body bottom change

The bottom plates prevent the insertion of foreign particles sufficiently into body



### Specifications

		New lined up EMG Series			New EMG Series			
		EMG05	EMG08	EMG17	EMG14	EMG20	EMG30	
<b>Jaw type</b>	Rib type & Perforated type	R.T / P.T	R.T / R.T	R.T / P.T	R.T / R.T	R.T / P.T	R.T / P.T	
<b>Number of Cylinder</b>		1ea	1ea	1ea	1ea	1ea	2ea	
<b>Specification</b>	Carrier Weight	tonnes	4-8	7-10	17-23	11-16	18-25	25-38
	Operating Weight	kg	415	525	1,350	1,050	1,423	2,275
	Max. Closing Force	tonnes	2.5	3.2	6.3	4.6	5.7	9.1
	Oil Flow Rate	lpm	20-60	20-60	60-120	40-80	60-120	80-160
	Pressure	bar	300	300	350	350	350	350
	Capacity	liter	230	320	630	450	750	1,100
	A	mm	1,042	1,186	1,507	1,273	1,536	1,663
	B	mm	1,533	1,736	1,984	1,744	2,044	2,350
	C	mm	1,162	1,303	1,538	1,340	1,548	1,609
	D	mm	1,292	1,447	1,650	1,433	1,678	1,777
E	mm	600	700	900	900	1,000	1,250	

※ Specifications contained in the catalogue may be changed without prior notice for improvement of quality and performance.

#### Head Office & Factory

332-3, Janggwan-ri, Jincheon-eub, Chungcheongbuk-do, Korea  
Tel\_+82-43-530-3300 Fax\_+82-43-530-3429

#### Sales & Marketing

Room #1203, Woolim Lion's Valley 2, 680, Gasan-Dong, Geumcheon-Gu, Seoul, Korea  
Tel\_+82-2-801-0800 Fax\_+82-2-801-0899



©EVERDIGM Corp. Printed in Korea